



Trusted RF Solutions™

## NuPower™ 05E05A S-Band Solid State Power Amplifier

30 Watts (CW)  
2.0 - 2.6 GHz

P/N: NW-PA-05E05A

(Includes NW-PA-ACC-CB09MC interface cable)



**The NuPower™ 05E05A is a small, highly efficient connectorized solid state power amplifier that provides 30 watts of RF power to boost performance of data links and transmitters.**

The NuPower 05E05A accepts a nominal 0 dBm (1 mW) RF input and provides 44 dB of gain from 2000 MHz to 2600 MHz for continuous wave (CW) and near-constant-envelope waveforms.

Based on the latest gallium nitride (GaN) technology, the NuPower 05E05A's 20% to 30 % power efficiency at rated power and <math>< 10 \text{ in}^3</math> form factor make it ideal for size, weight, and power-constrained broadband RF telemetry, tactical communication, and electronic warfare systems.

NuPower PAs feature over-voltage protection and can operate over a wide temperature range of -40 °C to +85 °C (baseplate).

**Extend your operational communication range with NuPower™ amplifiers from NuWaves Engineering.**

### Features

- 30 Watts RF Output Power
- 2000 MHz to 2600 MHz
- Small Form Factor (4.50" x 3.50" x 0.61")
- High-Efficiency GaN Technology
- 0 dBm Nominal RF Input
- Over-Voltage Protection
- Logic On/Off Control

### Benefits

- Extended Range
- Improved Link Margin
- Reduced load on DC power budget due to high efficiency operation
- Requires less volume on space-constrained platforms

### Applications

- Broadband RF Telemetry
- RF Communication Systems
- Electronic Warfare - Airborne Electronic Attack
- Unmanned Aircraft Systems (UAS)
- Unmanned Ground Vehicles (UGV)
- Software Defined Radios

# NuPower™ 05E05A Power Amplifier

## Specifications

### Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	3.5	A
Max RF Input Power, $Z_L = 50 \Omega$	15	dBm
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
EAR99

### Electrical Specifications @ 28VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	2000		2600	MHz	
RF Output Power	$P_{SAT}$	20	30		W	2000 MHz - 2600 MHz, 0 dBm input
Output Power @ 1dB Compression	$P_{1dB}$		45		dBm	2000 MHz
			44			2300 MHz
			45			2600 MHz
Small Signal Gain	G		55		dB	2000 MHz, @ -30 dBm input
			54			2300 MHz, @ -30 dBm input
			49			2600 MHz, @ -30 dBm input
Small Signal Gain Flatness	$\Delta G$		5		dB	$P_{in} = -30$ dBm
Input VSWR	VSWR		1.9:1			
Nominal Input Drive Level	$P_{IN}$		0		dBm	
Operating Voltage	VDC	27	28	30	V	
Quiescent Current	$I_{DQ}$		0.65		A	
Operating Current	$I_{DD}$		2.7		A	$P_{in} = 0$ dBm
Module Efficiency			41		%	
Switching Speed	$TX_{ON/OFF}$			2	$\mu S$	10% to 90%
Third Order Order Intercept Point (Two tone test at 1 MHz spacing, $P_{out} = 20$ dBm / tone)	OIP3		42		dBm	2000 MHz
			43			2300 MHz
			41			2600 MHz
Harmonics	2nd			-17	dBc	
	3rd			-18		
Output Mismatch (No Damage)				10:1		

# NuPower™ 05E05A Power Amplifier

## Specifications (cont.)

### Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	4.5 x 3.5 x 0.61	in	Max
Weight	9	oz	Max
RF Connectors, Input/Output	SMA Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	Adequate Heatsink Required		


### Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	$T_A$	-40		+60	°C
Operating Temperature (baseplate)	$T_C$	-40		+85	°C
Storage Temperature	$T_{STG}$	-55		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)					


## Performance Plots

Test Conditions: +28 VDC, +25 °C,  $Z_S=Z_L=50 \Omega$

RF Output Power

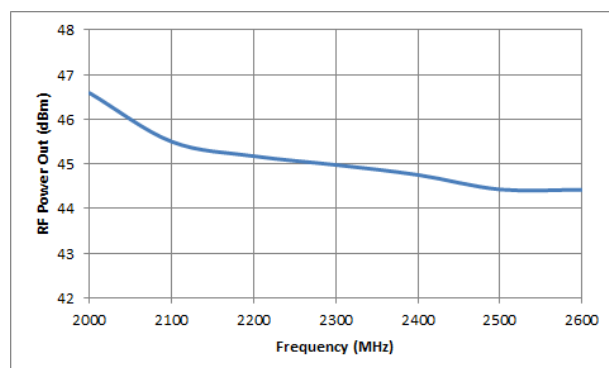


Gain

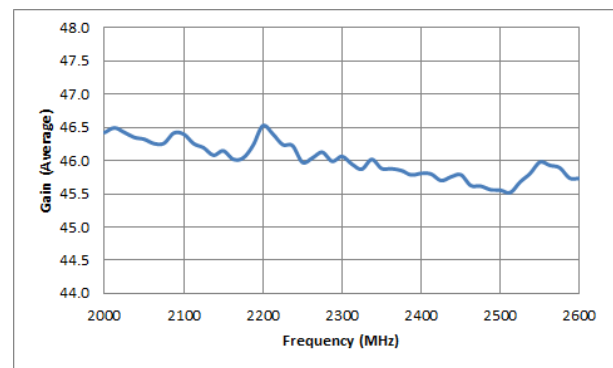


# NuPower™ 05E05A Power Amplifier

## Performance Plots (cont.)


P1dB & P3dB

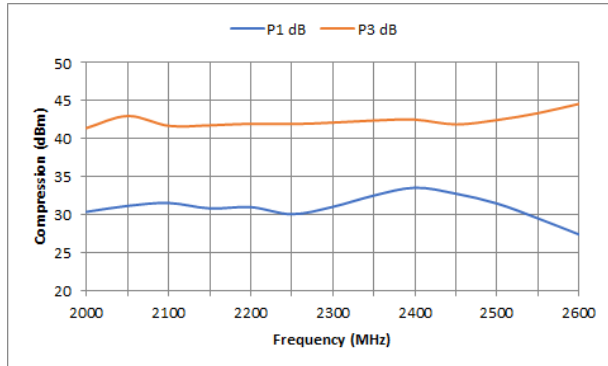


OIP3

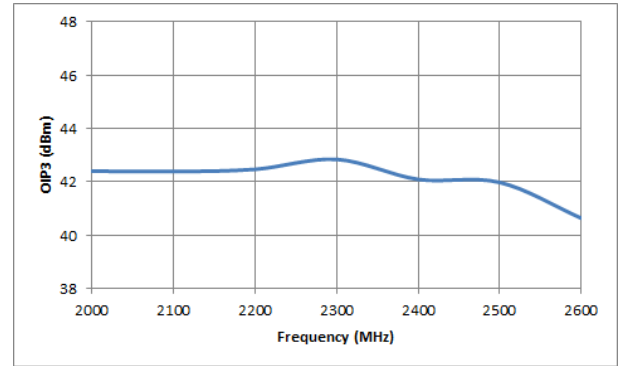


Efficiency vs. Output Power

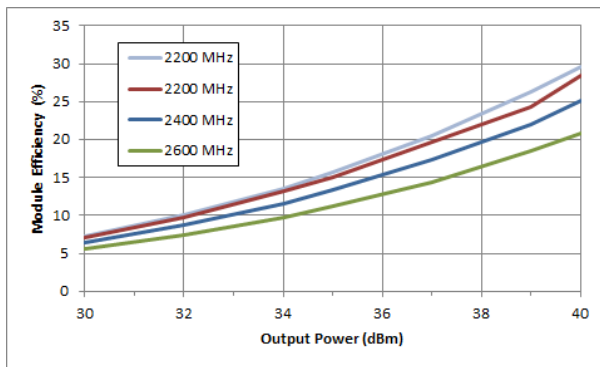


Efficiency vs. Frequency

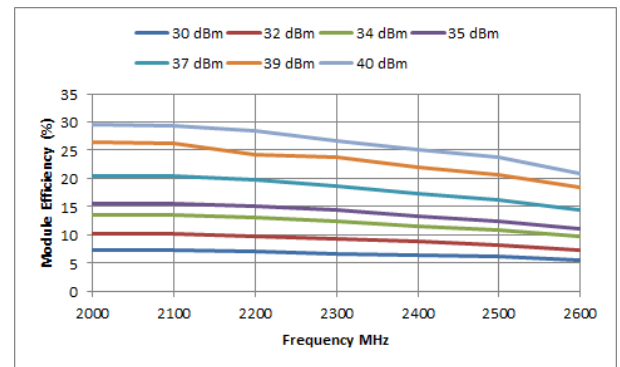


Error Vector Magnitude (%) [w/ OFDM Waveform]

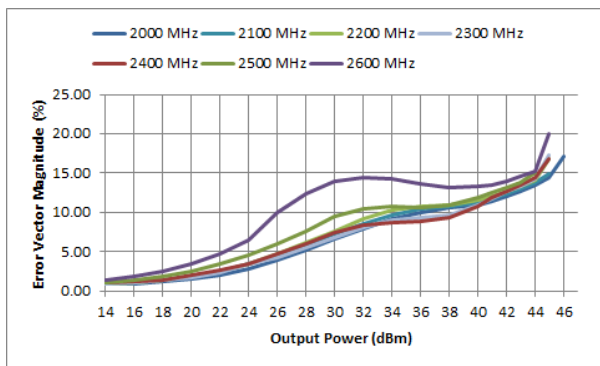


Error Vector Magnitude (dB) [w/ OFDM Waveform]

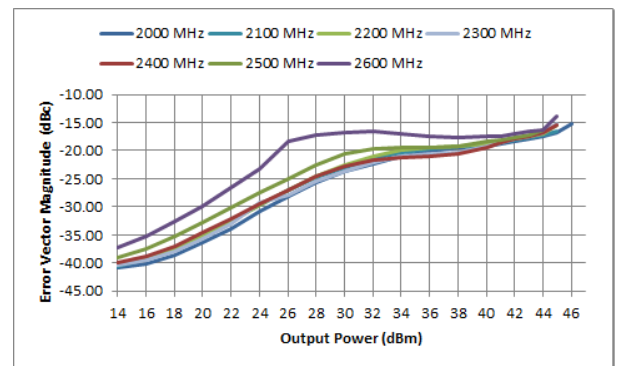

Harmonics (@ Psat)


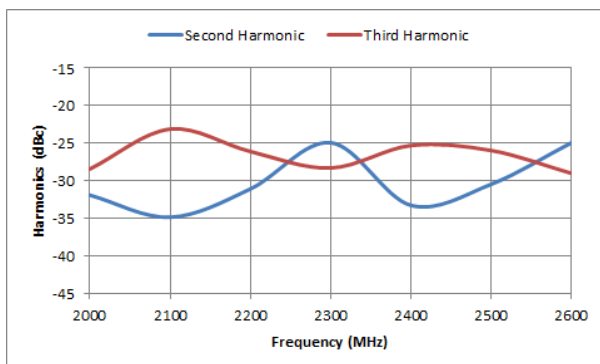


Input VSWR

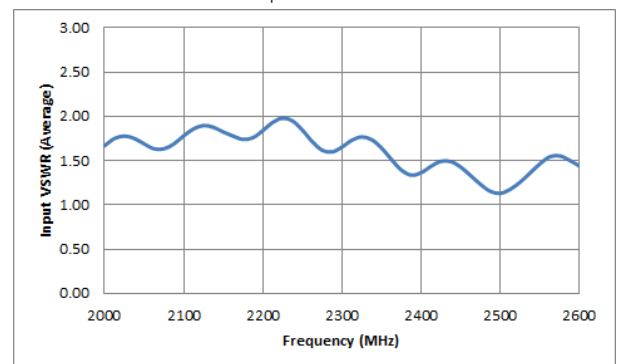


# NuPower™ 05E05A Power Amplifier

## Mechanical Outlines

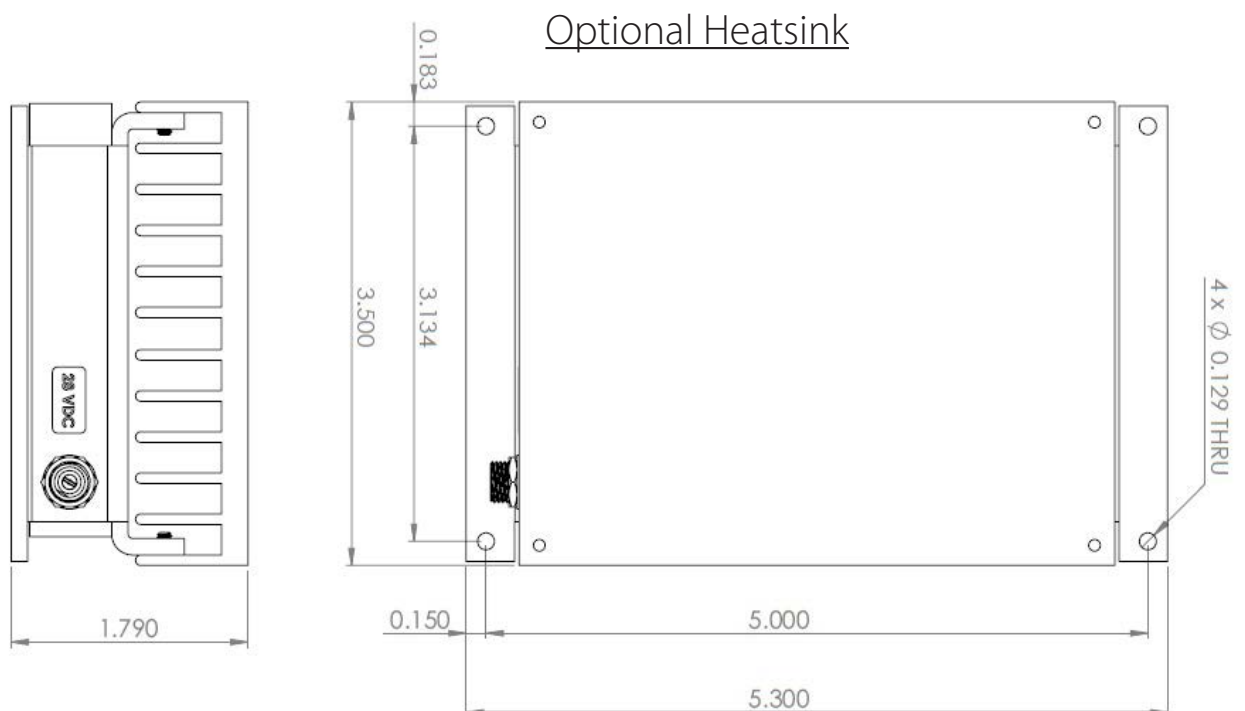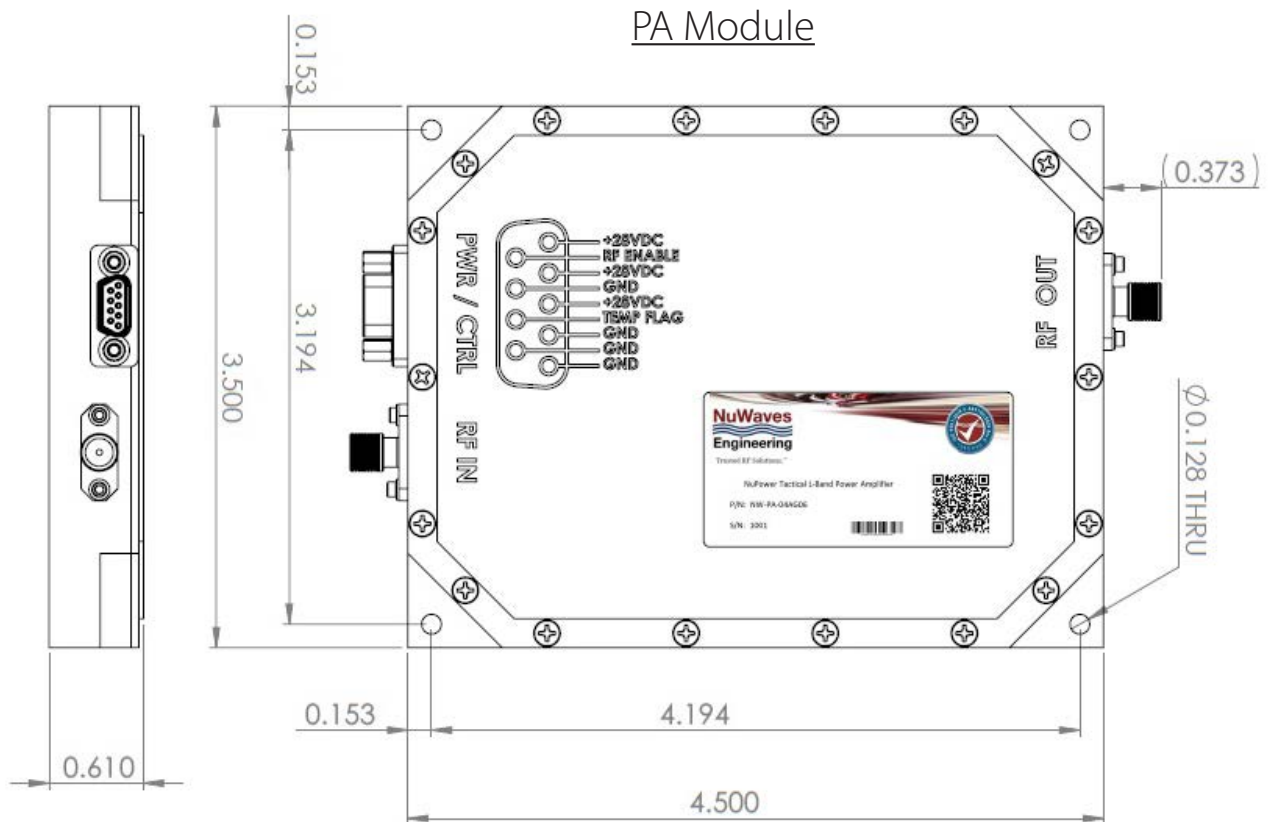


# NuPower™ 05E05A Power Amplifier

## PA Module and Accessory Images

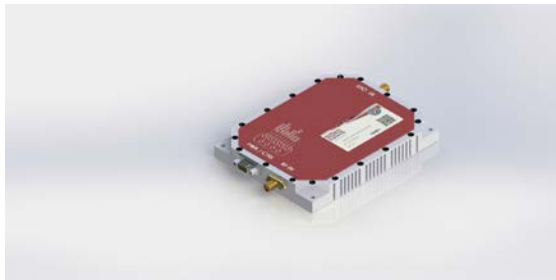

PA Module

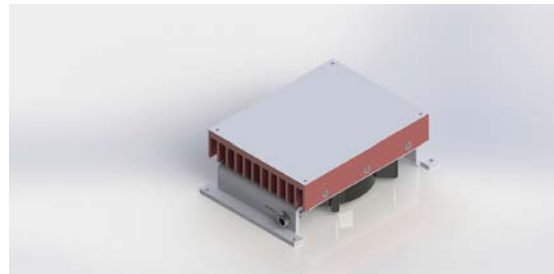

Optional Fan-Cooled Heatsink



PA Module w/ Fan-Cooled Heatsink

## Accessory Part Numbers

Part Number	Description
NW-FL-05LPLE-2500-SFSF-M01	Harmonic Filter Module
NW-PA-ACC-CB09MC	Standard Interface Cable Assembly - Flying Leads (included with module)
NW-PA-ACC-CT09MC	Upgraded Interface Cable Assembly - Banana Plug Termination
NW-PA-ACC-KT03	Accessory Kit, which includes Fan-Cooled Heatsink and Upgraded Interface Cable
NW-PA-ACC-HS05	Heatsink with Integrated Fan

## Pinout

Function	I/O	Pin
DC Power (+28 Volts)	I	3, 4, 5
Ground	I	1, 2, 6, 8
Over Temperature Flag 0V = temperature fault +5V = no fault	O	7
RF Enable 0V or GND = RF ON +5V or NC = RF OFF	I	9

## Contact NuWaves



NuWaves Engineering  
132 Edison Drive  
Middletown, OH 45044

[www.nuwaves.com](http://www.nuwaves.com)  
[product.sales@nuwaves.com](mailto:product.sales@nuwaves.com)  
513.360.0800

 **NuWaves**  
engineering

Trusted RF Solutions™