



Trusted RF Solutions™

NuPower™ 12A03A-D30 Micro L- & S-Band Solid State Power Amplifier

5 Watt CW
1.0 GHz - 2.5 GHz

P/N: NW-PA-12A03A-D30

(includes NW-PA-ACC-CB09MF interface cable)



The NuPower™ 12A03A-D30 Micro L- & S-Band Power Amplifier offers the smallest form factor of the NuPower family of PAs at 1.62 in³. This highly efficient solid state power amplifier provides over 5 watts of RF power across both L and S frequency bands.

Based on the latest gallium nitride (GaN) technology, the NuPower's power efficiency and miniature form factor make it ideal for size, weight, and power-constrained broadband RF telemetry and tactical communication systems. The NuPower 12A03A Power Amplifier takes low SWaP to a new level, allowing it to be integrated into some of the smallest aerial platforms flying today.

The NuPower 12A03A-D30 PA is also available with the standard 0 dBm (1 mW) input drive level (P/N: NW-PA-12A03A), for typical communication systems.

Extend your operational communication range with NuPower™ amplifiers from NuWaves Engineering.

Features

- 5 Watts RF Output Power
- 1.0 GHz to 2.5 GHz
- Miniature Package (1.80" x 1.80" x 0.50")
- High-Efficiency GaN Technology
- Transmit/Standby Mode
- Single Power Supply
- Over-Voltage Protection
- Reverse-Voltage Protection
- Logic On/Off Control

Benefits

- Extended Range
- Improved Link Margin
- Lessened load on DC power budget due to high efficiency operation
- Consumes less volume on space-constrained platforms

Applications

- Unmanned Aircraft Systems (UAS), Group 1 & 2
- Unmanned Ground Vehicles (UGV)
- Broadband RF Telemetry
- RF Communication Systems
- Software Defined Radios
- Test Labs

NuPower™ 12A03A Power Amplifier

Specifications

Absolute Maximums

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	2.4	A
Max RF Input Power, $Z_L = 50 \Omega$	33	dBm
Max Operating Temperature (ambient)	60	°C
Max Operating Temperature (baseplate)	85	°C
Max Storage Temperature	85	°C

Export Classification
EAR99

Electrical Specifications @ 28VDC, 25 °C, $Z_S=Z_L=50 \Omega$

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Operating Frequency	BW	1.0		2.5	GHz	
RF Output Power	P_{SAT}	5			W	$P_{in} = 0 \text{ dBm}$
Output Power @ 1dB Compression	P_{1dB}				dBm	
Small Signal Gain	G		7		dB	
Small Signal Gain Flatness	ΔG		± 3		dB	$P_{in} = -30 \text{ dBm}$
Power Gain Flatness			± 1		dB	$P_{in} = 0 \text{ dBm}$
Input VSWR	VSWR		1.8	3.5		
Nominal Input Drive Level	P_{IN}		+30	+33	dBm	
Operating Voltage	VDC	26	28	30	V	
Quiescent Current	I_{DQ}		0.35		A	
Operating Current	I_{DD}		0.85	1.25	A	$P_{in} = 0 \text{ dBm}$
Module Efficiency			30		%	
Third Order Order Intercept Point (Two tone test at 1 MHz spacing, $P_{out} = 20 \text{ dBm} / \text{tone}$)	OIP3				dBm	
Harmonics	2nd 3rd		-13		dBc	
Output Mismatch (No Damage)				10:1		

NuPower™ 12A03A Power Amplifier

Specifications (cont.)

Mechanical Specifications

Parameter	Value	Unit	Limits
Dimensions	1.80 x 1.80 x 0.50	in	Max
Weight	1.3	oz	Max
RF Connectors, Input/Output	SSMC Female		
Interface Connector	Micro-D, 9-pin Socket		
Cooling	External Heatsink (Optional)		


Environmental Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature (ambient)	T_A	-30		+60	°C
Operating Temperature (baseplate)	T_C	-30		+85	°C
Storage Temperature	T_{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude MIL-STD-810F - Method 500.4	ALT			30,000	ft
Vibration / Shock Profile (Random profile in x,y, z axis, as per Figure for 15 minute duration in each axis)					

The graph shows a trapezoidal power spectral density profile. The y-axis is labeled 'Power Spectral Density, g²/Hz' and the x-axis is labeled 'Frequency, Hz'. The profile starts at 20 Hz, rises with a slope of +3 dB/octave to 80 Hz, remains flat at 0.04 g²/Hz until 350 Hz, and then falls with a slope of -3 dB/octave to 2000 Hz. Vertical green lines mark the frequencies 20, 80, 350, and 2000 Hz.

NuPower™ 12A03A Power Amplifier

Mechanical Outline

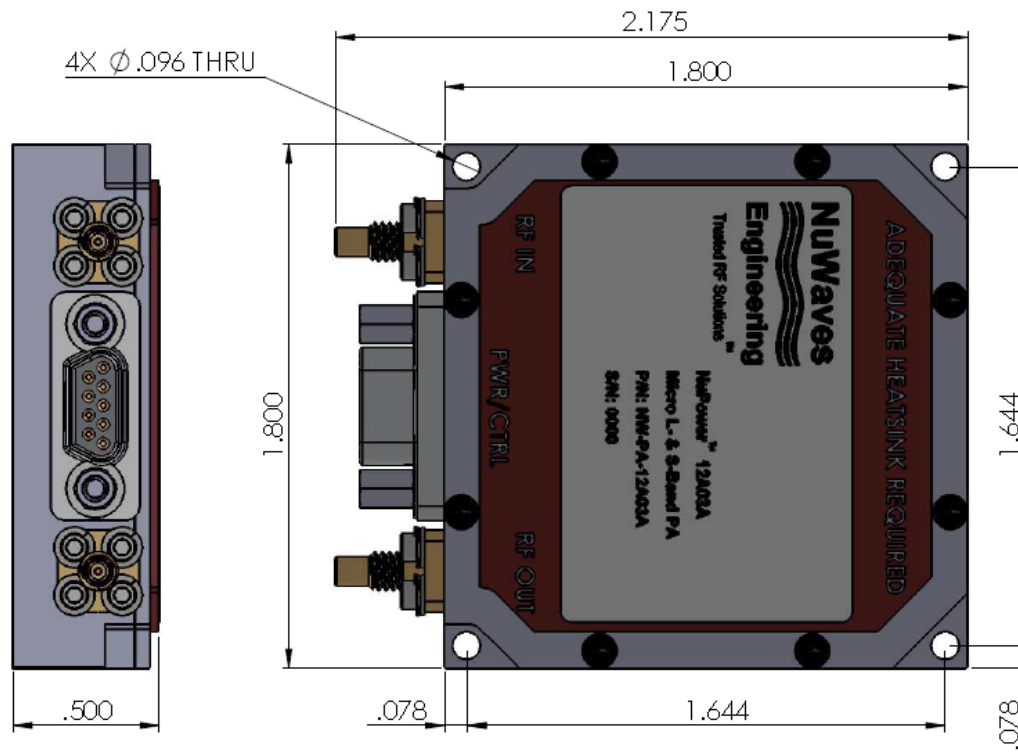

Accessory Part Numbers

Part Number	Description
NW-FL-05LPLE-2500-SFSF-M01	Harmonic Filter Module
NW-PA-ACC-CB09MF	Standard Interface Cable Assembly - Flying Leads (included with module)
NW-PA-ACC-CT09MF	Upgraded Interface Cable Assembly - Banana Plug Termination
NW-PA-ACC-KT04	Accessory Kit, which includes Fan-Cooled Heatsink and Upgraded Interface Cable
NW-PA-ACC-HS04	Heatsink with Integrated Fan

Pinout

Function	I/O	Pin
Ground	I	1, 2
DC Power (+28 VDC)	I	3, 4
RF Enable 0V or GND = RF ON +5V or NC = RF OFF	I	5
No Connect	-	6, 7 & 9
Over Temperature Flag 0V = temperature fault +5V = no fault	O	8

Contact NuWaves



NuWaves Engineering
132 Edison Drive
Middletown, OH 45044

www.nuwaves.com
product.sales@nuwaves.com
513.360.0800

NuWaves
engineering
Trusted RF Solutions™